



Descriptions

The LM386MX-1/NOPB audio power amplifier is mainly used in low voltage consumer products. To minimize peripheral components, the voltage gain is built-in to 20. But add an external resistor and capacitor between 1 and 8 pins to set the voltage gain to any value up to 200. The input is ground-referenced and the output is automatically offset to half the supply voltage.

At 6V supply voltage, its static power consumption is only 24mW, making LM386MX-1/NOPB especially suitable for battery-powered occasions.

Feature

- Battery Operation
- Minimum External Parts
- Wide Supply Voltage Range: 4 V–12 V
- Low Quiescent Current Drain: 4 mA
- Voltage Gains from 20 to 200
- Ground-Referenced Input
- Self-Centering Output Quiescent Voltage
- Low Distortion: 0.2% ($A_v = 20$, $V_s = 6$
 $R_L = 8\ \Omega$, $P_o = 125\text{ mW}$, $f = 1\text{ kHz}$)


Applications

- Active Filter
- AM-FM Radio Amplifiers Portable
- Tape Player Amplifiers Intercoms
- TV Sound Systems
- Line Drivers
- Ultrasonic Drivers
- Small Servo Drivers
- Power Converters Industrial

Ordering Information



Product Model	Package Type	Packing	Packing Qty
LM386MX-1/NOPB	SOP-8(SOIC-8)	Tape	2500Pcs/Reel

Schematic

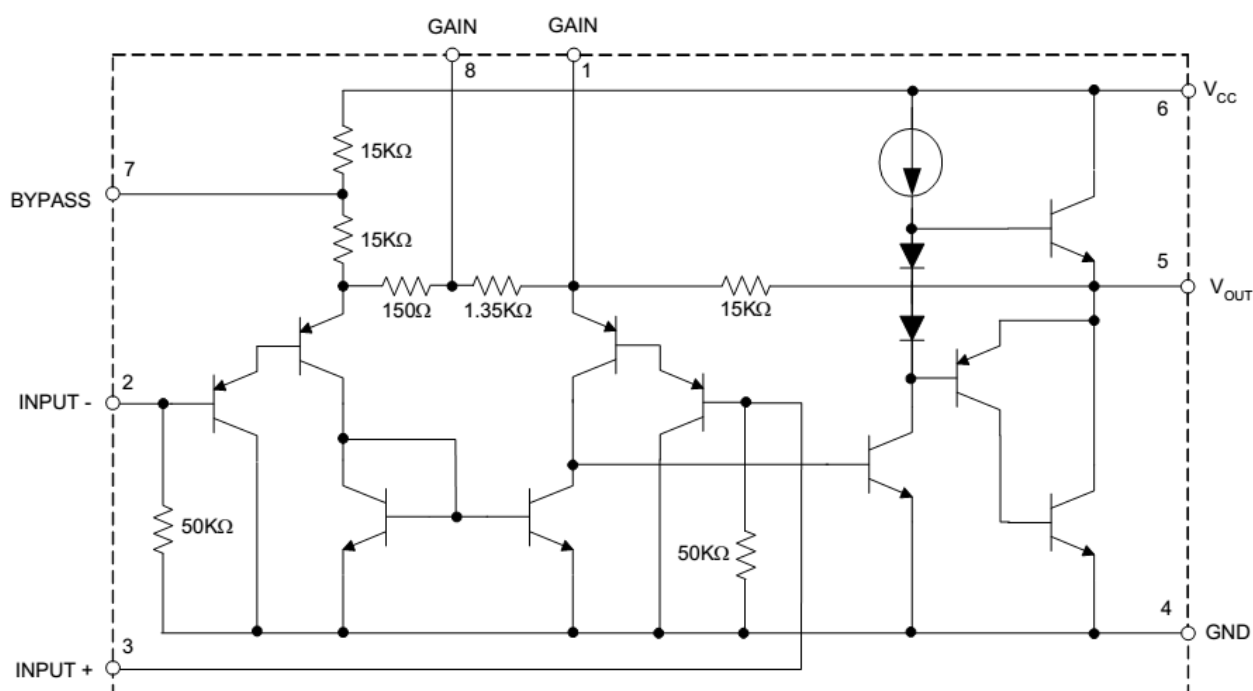

Pin Configurations

(Top View)

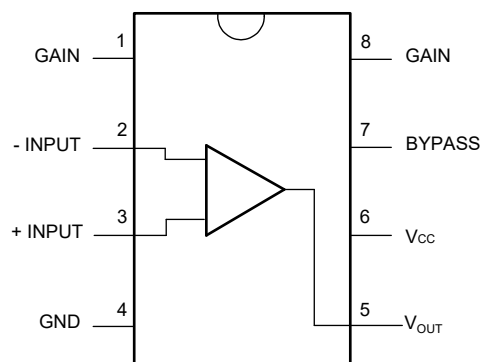

SOP-8(SOIC-8)

Pin Description

Pin		Function
No.	Name	
1	GAIN	Gain setting pin
2	– INPUT	Inverting input
3	+INPUT	Noninverting input
4	GND	Ground reference
5	V _{OUT}	Output
6	V _{CC}	Power supply voltage
7	BYPASS	Bypass decoupling path
8	GAIN	Gain setting pin



Absolute Maximum Ratings

(Tamb=25°C , Unless otherwise stated)

Name	Symbol	Value	Unit
Input Voltage	VIN	±0.4	V
Supply Voltage	Vcc	15	V
Package Dissipation	PD	660	mW
Welding temperature (10s)	Ts	260	°C
Junction temperature	Tj	150	°C
Operating temperature	Tamb	0~70	°C
Storage temperature	Tstg	- 40~125	°C

Electrical Characteristics

(Tamb=25°C,Vcc=6V,RL=8Ω,f=1kHz)

Parameters	Symbol	Condition of test	Min	Typ	Max	Unit
Operating Supply Voltage	Vcc		4		12	V
Quiescent Current	Icc	Vcc=6V, VIN=0		4	8	mA
Output Power	Po	Vcc=6V,RL=8Ω,THD=10%	250	325	-	mW
		Vcc=9V,RL=8Ω,THD=10%	500	700	-	mW
Voltage Gain	Av	Vcc=6V,f=1kHz	-	26	-	dB
		10μF from Pin 1 to 8		46		
Bandwidth	BW	Vcc=6V,Pins 1 and 8 Open	-	300	-	kHz
Total Harmonic Distortion	THD	Vcc=6V,RL=8Ω,Po=125mW, f=1kHz Pins 1 and 8 Open	-	0.2	-	%
Power Supply Rejection Ratio	PSRR	Vcc=6V,f=1kHz, CBYPASS=10uF, Pins 1 and 8 Open,Referred to Output		50		dB
Input Resistance	RIN			50		kΩ
Input Bias Current	IB	Vcc=6V,Pins 2 and 3 Open	-	250	-	nA



Typical Application

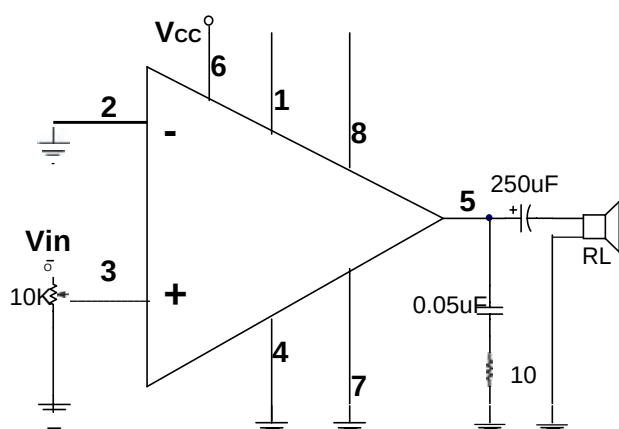


Figure 1. With Gain = 20

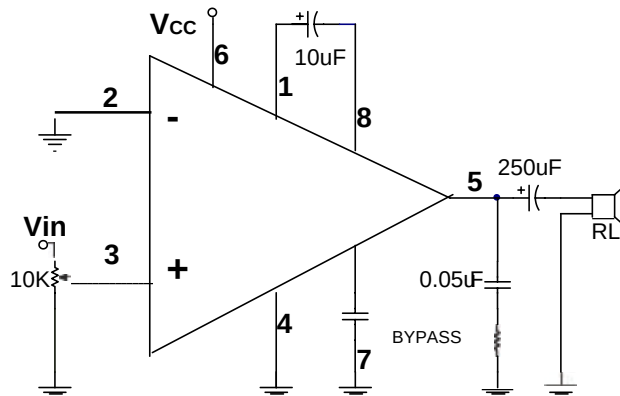


Figure 2. With Gain = 200

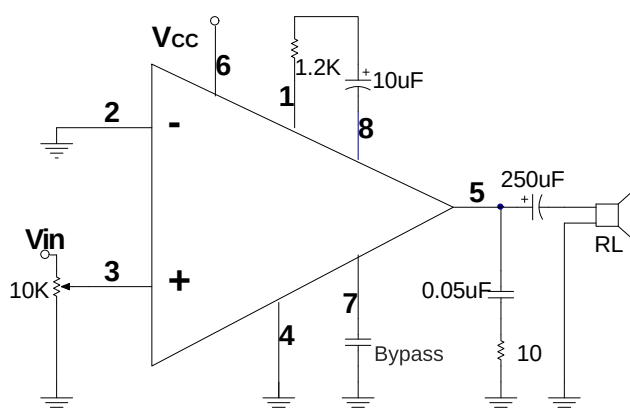


Figure 3 .With Gain = 50

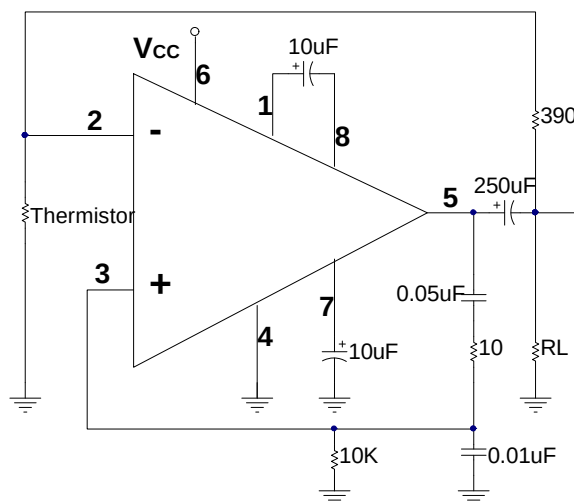


Figure 4 . Low distortion bridge oscillator

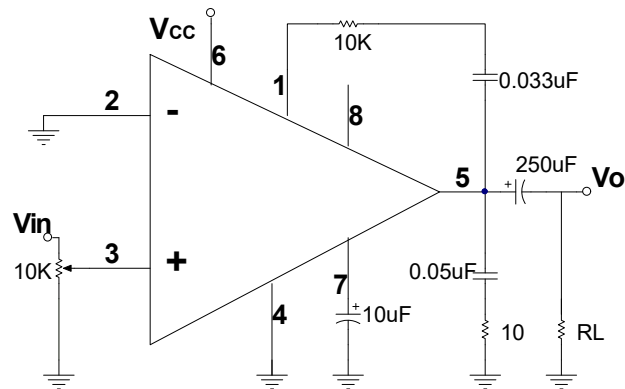


Figure 5 . Low frequency boost amplifier

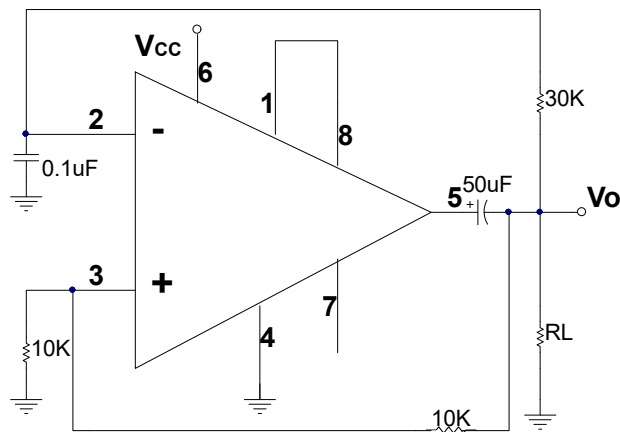


Figure 6 . Square wave oscillator

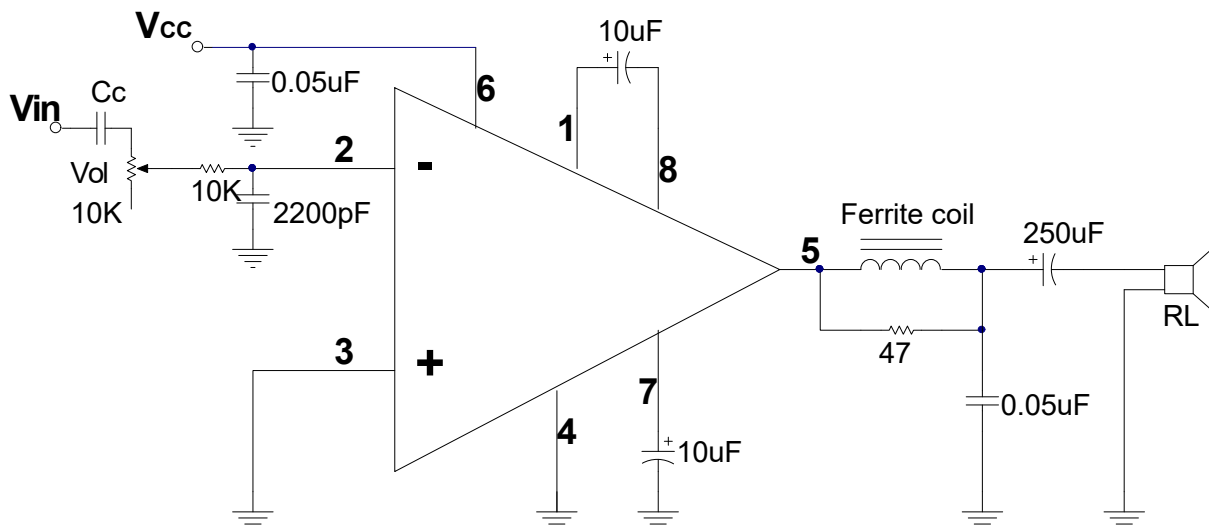


Figure 7 . Amplitude modulation radio audio amplifier



Application points

1、Gain Control

To make the LM386MX-1/NOPB a more versatile amplifier, two pins (1 and 8) are provided for gain control. With pins 1 and 8 open the 1.35-k Ω resistor sets the gain at 20 (26 dB). If a capacitor is put from pin 1 to 8, bypassing the 1.35-k Ω resistor, the gain will go up to 200 (46 dB). If a resistor is placed in series with the capacitor, the gain can be set to any value from 20 to 200. Gain control can also be done by capacitively coupling a resistor (or FET) from pin 1 to ground.

Additional external components can be placed in parallel with the internal feedback resistors to tailor the gain and frequency response for individual applications. For example, we can compensate poor speaker bass response by frequency shaping the feedback path. This is done with a series RC from pin 1 to 5 (paralleling the internal 15-k Ω resistor). For 6 dB effective bass boost: $R \approx 15$ k Ω , the lowest value for good stable operation is $R = 10$ k Ω if pin 8 is open. If pins 1 and 8 are bypassed then R as low as 2 k Ω can be used. This restriction is because the amplifier is only compensated for closed-loop gains greater than 9.

2、Input Biasing


The schematic shows that both inputs are biased to ground with a 50 k Ω resistor. The base current of the input transistors is about 250 nA, so the inputs are at about 12.5 mV when left open. If the dc source resistance driving the LM386MX-1/NOPB is higher than 250 k Ω it will contribute very little additional offset (about 2.5 mV at the input, 50 mV at the output). If the dc source resistance is less than 10 k Ω , then shorting the unused input to ground will keep the offset low (about 2.5 mV at the input, 50 mV at the output). For dc source resistances between these values we can eliminate excess offset by putting a resistor from the unused input to ground, equal in value to the dc source resistance. Of course all offset problems are eliminated if the input is capacitively coupled.

When using the LM386MX-1/NOPB with higher gains (bypassing the 1.35 k Ω resistor between pins 1 and 8) it is necessary to bypass the unused input, preventing degradation of gain and possible instabilities. This is done with a 0.1 μ F capacitor or a short to ground depending on the dc source resistance on the driven input.



Package Information

SOP-8(SOIC-8)

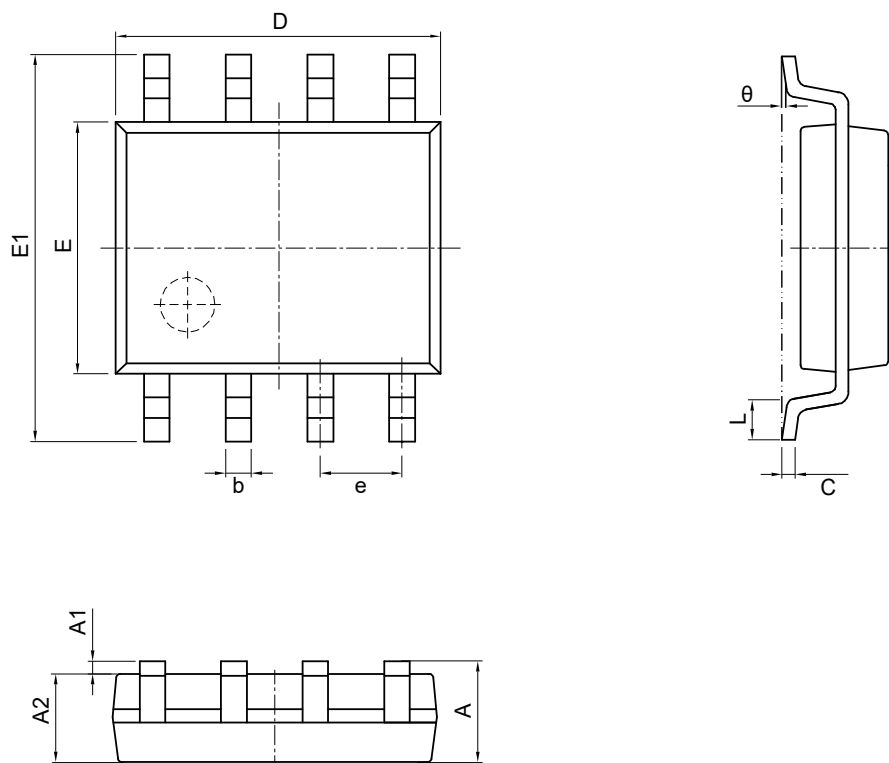

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min(mm)	Max(mm)			Min(in)	Max(in)
A		1.350	1.750	A		0.053	0.069
A1		0.100	0.250	A1		0.004	0.010
A2		1.350	1.550	A2		0.053	0.061
b		0.330	0.510	b		0.013	0.020
c		0.170	0.250	c		0.006	0.010
D		4.700	5.100	D		0.185	0.200
E		3.800	4.000	E		0.150	0.157
E1		5.800	6.200	E1		0.228	0.224
e		1.270(BSC)		e		0.050(BSC)	
L		0.400	1.270	L		0.016	0.050
θ		0°	8°	θ		0°	8°



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.